



TTArtisan

# *TTArtisan* METER

## User Manual

Please read the manual carefully before use and save it for future use.

## Specifications

Material: 6061 Aluminum	Measuring Angle: Approximately 45°
Power Source: CR2032	Shutter Speed: Ambient 1sec.- 1/2000
Battery Life: Around 60h	Measuring Mode: Average Metering


### IRIS

(The f-stop in green is replaced by a white dot in the dial.)

F1.0	F1.2	F1.4	F1.7	F2.0	F2.4	F2.8	F3.5
F4.0	F5.0	F5.6	F7.1	F8.0	F10	F11	F13
F16	F19	F22					

### ISO

25	50	100	200	400	800	1600	3200
----	----	-----	-----	-----	-----	------	------

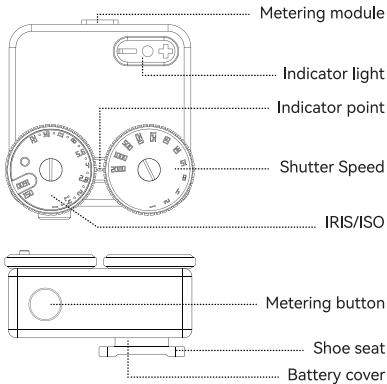


# Instructions

## ① Equipment Installation:

Open the package, use a cross screwdriver to unscrew the top right screw at the bottom, and insert the button battery.

Note: When inserting the battery, first insert it from the end of the battery compartment with the metal piece, and then press the other end, the battery is stuck in the battery compartment and the installation is successful.

If it is difficult to install, do not press violently, please adjust the battery direction and try again.




## ② Metering Steps:

Set the ISO, aim at the target to be shot, press the metering button, and wait for 0.5s to complete the metering.

Rotate the aperture dial or the shutter dial until the indicator light turns green which means an accurate exposure.

As shown in the right figure, the current accurate exposure value is F5.6, S1/125. Then according to the algorithm, the combination of F and S linked by the red dotted line above and below the red dot is also the current accurate exposure. In the case of ISO 400, there are a total of 5 recommended parameters, as shown in the table below.



Speed (sec)	1/30	1/60	1/125	1/250	1/500
Aperture	F11	F8.0	F5.6	F4.0	F2.8

### ③ Metering Button:

Click the button to start metering.

If there is no operation within 10 seconds, the indicator will automatically turn off and wake up by any operation;

If there is no operation within 60 seconds, it will enter sleep mode, and you need to click the metering button again to wake up.

### ④ Indicator Light:



Overexposure  
within one step



Overexposure



Accurate Exposure



Underexposure  
within one step



Underexposure

## Equipment Preservation and Warranty Matters

If the device is not used for a long time, please remove the battery and store it in a dry place.

The warranty is two years from the date of purchase. The following conditions are not covered by our warranty service:

1. Counterfeit and anti-control products of our company.
2. Accidental or man-made damage, water intake, bumps, etc.
3. Unable to provide proof of purchase such as receipts, order numbers, etc.
4. The purchase date of the product exceeds the warranty period.



Official Web



WeChat



Facebook